

ReSound Live™



Product Information

LV40/50-P / LV740/50-P / LV540/50-P
 LV40/50-DP / LV740/50-DP / LV540/50-DP
 POWER ITE

Product Description

ReSound Live gives your hearing a surround sound experience. It's like going from a set of stereo speakers to a full blown surround sound system.

The surround sound experience is a greater sense of awareness – of 'being there'. Surround sound provides a more full and detailed sound quality, increased ability to locate where sounds are coming from and the ability to hear every word clearly – even in challenging environments.

Careful matching of ReSound Live to mimic the natural human ear is a key element in recreating the surround sound experience.

ReSound Live has two state-of-the-art directionality systems that work together with the surround sound processor. The new AutoScope Adaptive Directionality™ and Natural Directionality™ II set new standards for conventional and asymmetrical fittings.

The powerful Dual Stabilizer® II DFS with WhistleControl™ ensures unprecedented distortion free feedback suppression even in dynamic environments. Combined with the most robust noise reduction system (NoiseTracker™ II and effective suppression of wind noise) the wearer will get the ultimate in sound quality.


Live 9 Live 7 Live 5

	Live 9	Live 7	Live 5
Personalised blending point - adjustable*	●		
Surround sound processor with integrated wind noise suppression	●	●	●
NoiseTracker™ II noise reduction levels (-3, -6, -8, -10 dB)	●	⊙	○
17-band Warp™ compression with extended bandwidth	●	●	
9- band Warp™ compression with extended bandwidth			⊙
WhistleControl™ – sensitivity levels	●	⊙	○
Dual Stabilizer® II DFS	●	●	●
Impulse Noise Smoother	●	●	●
Natural Directionality™ II*	●		
AutoScope Adaptive Directionality™*	●		
MultiScope Adaptive Directionality™*	●	⊙	
Adaptive Directionality*	●	●	●
Fixed Directionality*	●	●	●
SoftSwitching™*	●	●	●
EchoStop™*	●	●	●
Environmental Optimizer™	●		
Onboard Analyzer™ II data logging	●	●	●
Gain handles	9	7	6
Fully flexible programs**	●	⊙	○
SmartStart™	●	●	●
Acoustic indications of user control and notifications	●	●	●
Complete family of appealing, discreet and comfortable design	●	●	●

○ Standard
 ⊙ Advanced
 ● Ultimate

* Not available in single mic devices
 ** Excluding the CIC devices that do not contain a push button

Fitting Range

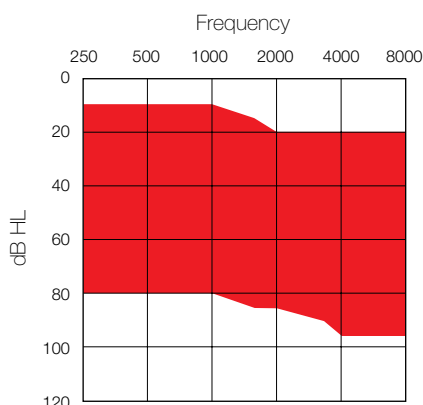

GN ReSound A/S
 Lautrupbjerg 7
 DK-2750 Ballerup, Denmark
 Tel.: +45 45 75 11 11
 Fax: +45 45 75 11 19
 www.resound.com

Standard Configuration

- Dual microphone technology (LV40/50-DP, LV740/50-DP and LV540/50-DP only)
- Size 13 and 312 battery
- Battery door with integrated on/off switch
- Push button
- Programmable volume control (optional)
- Telecoil with T and MT modes
- Supports StepVent
- Available in 3 colours

Fitting Requirements

- Aventa™ fitting software version 2.9 or higher
- CS63 FlexStrip Cable (3-pin)
- Speedlink™, HI-PRO or NOAHlink interface (Speedlink recommended)

ReSound

rediscover hearing

Technical Specifications


		IEC 118-0 Ear Simulator	IEC 118-7 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz* / HFA**	49	46	dB
Full-on gain (50 dB SPL input)	Max.	68	58	dB
	1600 Hz* / HFA**	61	53	dB
Maximum output (90 dB SPL input)	Max.	135	125	dB SPL
	1600 Hz* / HFA**	131	122	dB SPL
Total harmonic distortion	800 Hz	0,7	0,4	%
	1600 Hz	0,2	0,5	%
Telecoil sensitivity (1 mA/m input)	Max.	99	-	dB SPL
Full-on Telecoil sensitivity @1 mA/m, 1600 Hz (IEC)	1600 Hz* / HFA**	91	83	dB SPL
HFA - SPLITS @ 31.6 mA/m (ANSI)	HFA	-	106	dB SPL
Equivalent input noise, w/o Noise reduction		24	24	dB SPL
1/3 Octave Equivalent Input Noise, w/o Noise reduction		12	-	dB SPL
Frequency range (DIN 45605*/ANSI**)		100-5040	100-5050	Hz
Current Drain		1,0	1,1	mA
Typical Battery life time (Battery type 312/13)		160/290	145/264	hrs

* IEC 118-0, Ear Simulator


** IEC 118-7, 2cc coupler

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.


Maximum Output (OSPL 90)

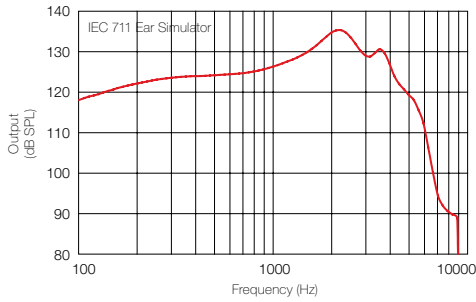


Maximum Output (OSPL 90)

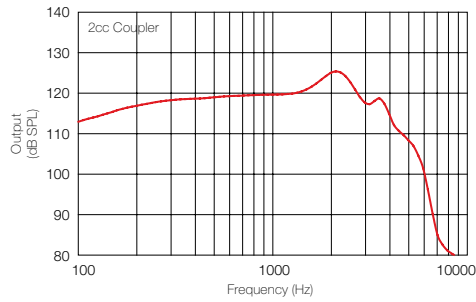


Full-On and Reference Test Gain

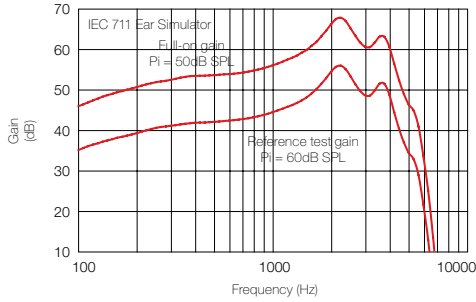


Full-On and Reference Test Gain

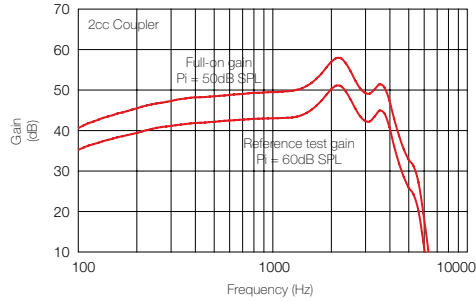

Input/Output Response



Telecoil Response

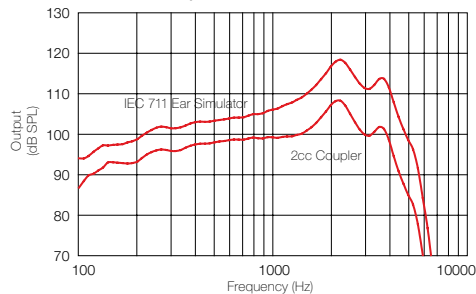

Full-On Gain Parameter Settings*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	37	37	37	37	37	37	37	37	37
G[50]	52	52	52	52	52	52	52	52	52

Reference Test Gain Parameter Settings for 118-0*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	30	30	30	30	30	30	30	30	30
G[50]	45	45	45	45	45	45	45	45	45

Reference Test Gain Parameter Settings for ANSI and 118-7*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	35	35	35	35	35	35	35	35	35
G[50]	50	50	50	50	50	50	50	50	50

*Settings in accordance with Aventa fitting software